


## Flats

SECTION NUMBER	A	B	R	MASS kg/m	OUTSIDE PERIM	STOCKED IN ANODISED
J781	10.00	3.00		0.082	26.00	
J791 <sup>+</sup>	12.00	3.00		0.097	30.00	
9741	12.00	6.00		0.194	36.00	
5991	16.00	3.00		0.130	38.00	✓
0632	19.05	4.00	2.00	0.195	42.60	
5989	20.00	1.60		0.087	43.20	
5992	20.00	3.00		0.162	46.00	✓
4954	20.00	6.00		0.325	52.00	
9336	25.00	1.60		0.108	53.20	✓
5993	25.00	3.00		0.203	56.00	
5996	25.00	6.00		0.405	62.00	
33943~	25.00	10.00	5.00	0.619	100.00	✓
5999	25.00	12.00		0.810	74.00	
0340	25.40	4.75		0.326	60.30	
0537	25.40	9.53		0.654	69.90	
34559	30.00	3.00		0.244	66.00	
0322	31.75	4.75		0.407	73.00	
0634	31.75	12.70		1.089	88.90	
4996	38.00	6.00		0.601	88.20	
0630	38.10	4.78		0.494	85.80	
6077	40.00	3.00		0.324	86.00	✓
6706	40.00	6.00		0.648	92.00	
7426	40.00	10.00		1.080	100.00	
1864	44.45	3.18		0.384	95.25	
K024	47.65	1.42		0.184	98.10	

+ Available in 6.0m lengths only

~ Available in anodised only

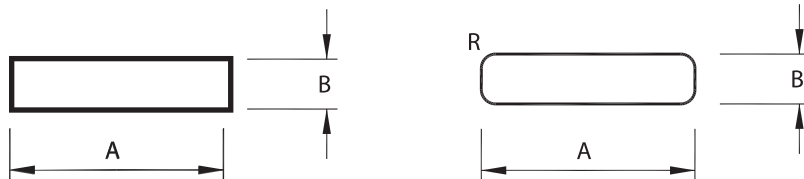


For NZ based customers. All lengths are stocked in 6060 T5 - mill finish - 5m lengths (unless specified)  
All peripheries less than 100mm are deemed 100mm for surface finish purpose

# Flats

SECTION NUMBER	A	B	R	MASS kg/m	OUTSIDE PERIM	STOCKED IN ANODISED
5994	50.00	3.00		0.405	106.00	✓
5997	50.00	6.00		0.810	112.00	
7425	50.00	10.00		1.350	120.00	
4978#	50.00	25.00		3.382	147.25	
J403	60.00	3.00		0.488	126.00	
8776	60.00	6.00		0.972	132.00	
9777	60.00	12.00		1.944	143.70	
J900#	64.00	32.10		5.567	192.20	
X190	75.00	5.00		1.014	158.23	
4989	76.20	3.00		0.620	158.40	✓
0529	76.20	9.53		1.961	171.50	
J723	80.00	1.60		0.347	163.20	
6373	80.00	3.00		0.648	166.00	
7040	80.00	6.00		1.296	172.00	
J712	100.00	1.60		0.433	203.20	
5995	100.00	3.00		0.810	206.00	✓
Z120	100.00	5.00		1.355	210.00	
5998	100.00	6.00		1.620	212.00	
8333	100.00	10.00		2.700	220.00	
E301	125.00	6.00		2.033	262.00	
3301	127.00	12.70		4.355	279.40	
33972	150.00	5.00		2.033	310.00	
5784	152.40	25.40		10.452	355.60	
E320	200.00	10.00		5.420	420.00	

# Available in 6061 T6 only

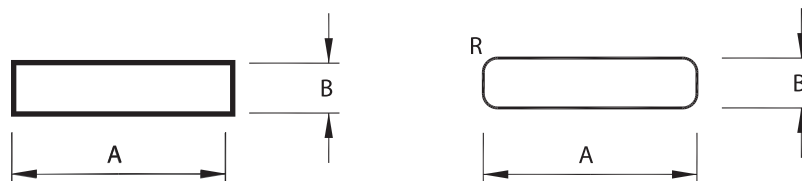

For NZ based customers. All lengths are stocked in 6060 T5 - mill finish - 5m lengths (unless specified)  
All peripheries less than 100mm are deemed 100mm for surface finish purpose