
Hollows - Rectangular

SECTION NUMBER	A	B	T	R1	R2	MASS kg/m	OUTSIDE PERIM	STOCKED IN ANODISED
K496	37.40	14.40	1.20	3.00	2.00	0.308	98.20	
9406	38.00	25.00	1.50	3.00	1.50	0.470	120.80	
X510+	38.00	25.00	2.00	3.00	1.50	0.622	120.85	
30486+	40.00	20.00	1.60			0.493	120.00	
30485	40.00	20.00	3.00			0.878	120.00	
K582	40.00	25.00	2.00			0.661	130.00	
35493#	40.00	25.00	2.00	3.00	1.50	0.646	124.85	
E905	50.00	25.00	1.60			0.623	150.00	
34406~	50.00	25.00	2.00	3.00	1.50	0.751	144.85	
9433	50.00	25.00	3.00			1.118	150.00	
X544+	50.00	25.00	3.00	3.00		1.101	144.85	
37044	50.00	30.00	2.00			0.824	160.00	
30497	50.00	40.00	2.00			0.932	180.00	
G705	50.00	40.00	3.00			1.366	180.00	
J090	60.00	40.00	3.00			1.528	200.00	
Z357	65.00	16.00	1.20	3.00	2.00	0.500	156.85	
7652	70.00	40.00	3.00			1.691	220.00	
31442	75.00	25.00	3.00	1.00		1.526	198.28	
30837	75.00	40.00	2.00			1.203	229.31	
E709	75.00	50.00	2.50			1.626	250.00	
K011	76.00	25.00	2.40			1.252	202.00	
K910	80.00	40.00	3.00			1.854	240.00	
6490	80.00	50.00	3.00			2.008	260.00	
30240+	80.00	50.00	3.00	5.00	2.00	1.967	251.42	
31300^	100.00	25.00	1.60			1.056	250.00	
6669~	100.00	25.00	2.50			1.626	250.00	
7955	100.00	45.00	3.00			2.252	290.00	
J845	100.00	50.00	2.00			1.583	300.00	
9985+	100.00	50.00	3.00			2.341	300.00	
30752~	100.00	50.00	3.00	4.00	1.00	2.307	293.13	
34048	100.00	50.00	4.00			3.079	300.00	
K102~	100.00	50.00	6.00	8.00	2.00	4.348	286.27	
G589	125.00	40.00	3.00			2.585	330.00	
J863+	150.00	50.00	3.00			3.154	400.00	
30388	150.00	75.00	5.00	5.00	2.50	5.783	441.42	
37214§	150.00	100.00	3.00	0.50		3.967	499.14	
Z335-	200.00	50.00	3.00			3.960	500.00	✓
35513*	250.00	50.00	3.00	0.40		4.780	599.31	
39274*	300.00	50.00	3.50	0.40		6.506	699.31	

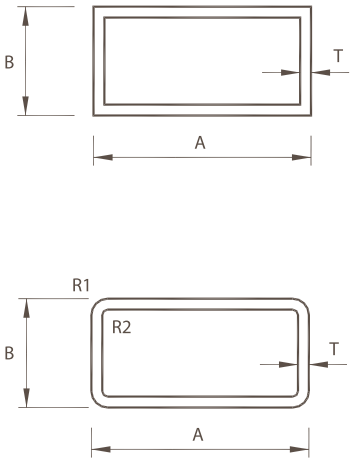

+ Also available in 6.0m lengths
- Also available in 4.0m, 6.0m and 6.5m lengths
* Also available in 4.0m and 6.5m lengths
~ Available in 6.0m lengths only
§ Available in 6.05m lengths only
# Available in 6.75m lengths only
^ Available in 5.1m and 6.0m lengths

For NZ based customers. All lengths are stocked in 6060 T5 - mill finish - 5m lengths (unless specified)
All peripheries less than 100mm are deemed 100mm for surface finish purpose